


PRODUCT INFORMATION SUMMARY




Ref.	EAN	Finish
BDK034-4	8435668005708	Acero S316

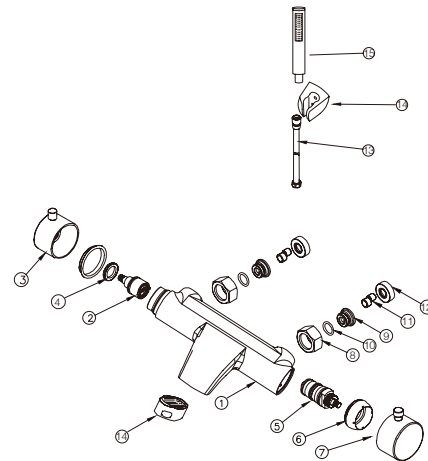


CODE	NAME	MATERIAL	REF
1	Faucet body	SUS 316	
2	Diverter cartridge	Assembly	
3	Diverter handle	SUS 316	
4	Cap	SUS 316	
5	Cartridge Ø35mm	Assembly	CR1012*
6	Decorative cover plate	SUS 316	
7	Open handle	SUS 316	
8	Hexagon nut	SUS 316	
9	Water level screw	SUS 316	
10	O-ring	NBR	
11	Cabrio leg	SUS 316	
12	Cover plate	SUS 316	
13	Shower hose	SUS 316	FLX005/AC*
14	Shower seat	SUS 316	SMD007/AC*
15	Shower hand	SUS 316	MDR015/AC*

* CONSULTAR PARA ACABADOS DE COLOR

Installing instruction



Step 1. Connect curved leg with the inlet pipe inside the wall



Step 2. Connect decorate cover to curved leg





Step 3. Install shower faucet properly, and connect to curved leg on the wall





Step 4. Test function of shower set, clean the set

Usage function instruction



Detalles	
FLOW RATE REF	BDK034-4
water outlet mixer water 0.1Mpa(L/MIN)	3
water outlet mixer water 0.3Mpa(L/MIN)	8
water outlet mixer water 0.5Mpa(L/MIN)	11
water outlet singer cold water 0.1Mpa(L/MIN)	2.5
water outlet singer cold water 0.3Mpa(L/MIN)	7
water outlet singer cold water 0.5Mpa(L/MIN)	10.1
hand shower mixer water 0.1Mpa(L/MIN)	2.16
hand shower mixer water 0.3Mpa(L/MIN)	6.9
hand shower mixer water 0.5Mpa(L/MIN)	9.83
hand shower singer cold water 0.1Mpa(L/MIN)	1.8
hand shower singer cold water 0.3Mpa(L/MIN)	6
hand shower singer cold water 0.5Mpa(L/MIN)	8.6

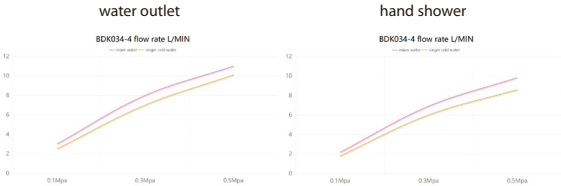

Product sizes (cm)	32.5*20.5*14.2
Weight (kg)	2.86
Guarantee	10 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical depMOSCUment is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing pMOSCUs such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

