


PRODUCT INFORMATION SUMMARY




Ref.	EAN	Finish
BDAR025	8435668002431	Chrome
BDAR025-BGM	8435668037730	Black gun metal
BDAR025-NG	8435668002547	Matte black
BDAR025-OC	8435668037747	Brushed gold
BDAR025-BL	8435668002530	Matt white

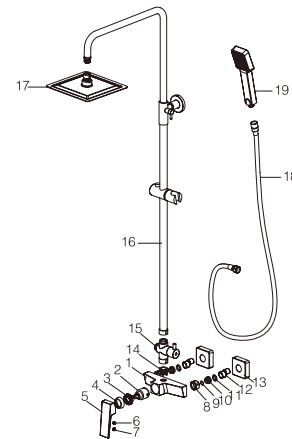


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	body	brass		16	pipe	SUS 304	RR0011*
2	cartridge	35mm	CRT001*	17	shower head	SUS 304	RDC001*
3	nut	brass		18	hose	SUS 304 / PVC	FLX005*
4	cover	ABS		19	shower hand	ABS	MDDR001*
5	handle	Zinc					
6	screw	SUS 304					
7	cover	ABS					
8	nut	brass					
9	O-ring	NBR					
10	screw	SUS 304					
11	rubber	NBR					
12	cabrio leg	SUS 304					
13	cover	SUS 304					
14	connect	brass					
15	diverter	brass					

* CONSULTAR PARA ACABADOS DE COLOR

shower set installing instruction




Step 1. Connect curved leg with the inlet pipe inside the wall




Step 2. Connect decorative cover to curved leg




Step 3. Install shower faucet properly and connect to curved leg on the wall



Step 4. Install shower pipe according to the distance of fix part




Step 5. Install shower hand and shower head to the set




Step 6. Test function of shower set, clean the set

Usage function instruction



Hot 90° Cold



Open 135°

ART
Series

IMEX
BATH EQUIPMENTS



ART
Series

IMEX
BATH EQUIPMENTS

ART
Series

IMEX
BATH EQUIPMENTS

Detalles	
FLOW RATE REF	BDAR025
hand shower mixer water 0.1Mpa(L/MIN)	6.2
hand shower mixer water 0.3Mpa(L/MIN)	11.34
hand shower mixer water 0.5Mpa(L/MIN)	15.23
hand shower singer cold water 0.1Mpa(L/MIN)	6.16
hand shower singer cold water 0.3Mpa(L/MIN)	11.19
hand shower singer cold water 0.5Mpa(L/MIN)	15.06
shower head mixer water 0.1Mpa(L/MIN)	6.23
shower head mixer water 0.3Mpa(L/MIN)	11.24
shower head mixer water 0.5Mpa(L/MIN)	14.9
shower head singer cold water 0.1Mpa(L/MIN)	6.19
shower head singer cold water 0.3Mpa(L/MIN)	11.12
shower head singer cold water 0.5Mpa(L/MIN)	14.81

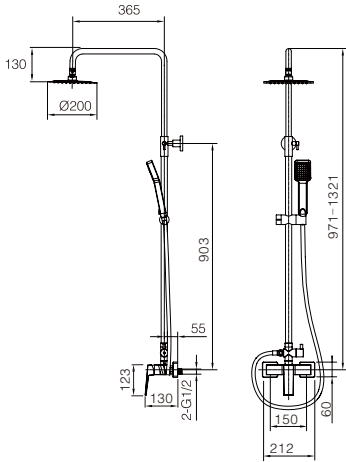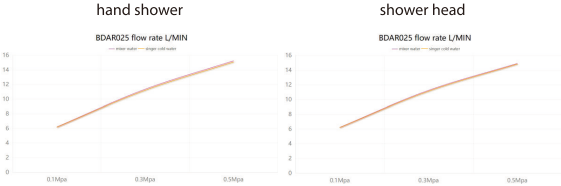

Product sizes (cm)	42.5*13.3*90
Weight (kg)	5.5
Guarantee	5 years
Max Preasure (bar)	5
Min Preasure (bar)	0.5
Optimum preasure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

