



PRODUCT INFORMATION SUMMARY

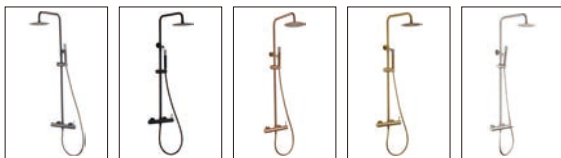


Ref.	EAN	Finish
BDM039	8435668030151	Chrome
BDM039-BGM	8435668030168	Black gun metal
BDM039-NG	8435668030175	Matte black
BDM039-ORC	8435668030199	Brushed rose gold
BDM039-OC	8435668030182	Brushed gold
BDM039-NQ	8435668056700	Brushed nickel

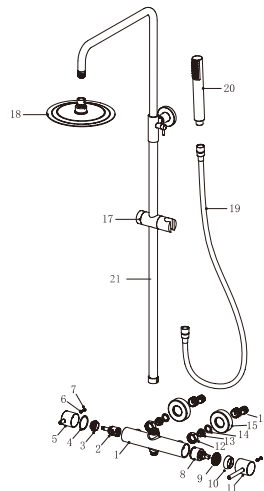


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Body	Brass		16	Cabrio leg	SUS 304	
2	Cartridge	25mm up	CRT068*	17	Slider	SUS 304	AR00014*
3	Nut	Brass		18	Shower head	SUS 304	RDN0001*
4	Washer	POM		19	Hose	SUS 304 / PVC	FLX0001*
5	Handle	Zinc		20	Shower hand	ABS	MDR015*
6	Screw	SUS 304		21	Pipe	SUS 304	
7	Cover	ABS					
8	Cartridge	35mm	CRT006*				
9	Nut	Brass					
10	Cover	ABS					
11	Handle	Zinc					
12	Nut	Brass					
13	Valve	SUS 304					
14	Rubber ring	NBR					
15	Cover	SUS 304					

* CONSULTAR PARA ACABADOS DE COLOR


Installing instruction



Step 1. Connect curved leg with the inlet pipe inside the wall




Step 2. Connect decorate cover to curved leg



Step 3. Install shower faucet properly and connect to curved leg on the wall



Step 4. Install shower pipe according to the distance of fix part






Step 5. Install shower hand and shower head to the set





Step 6. Test function of shower set, clean the set

Usage function instruction



FLOW RATE	
Detalles	
FLOW RATE REF	BDM039
hand shower mixer water 0.1Mpa(L/MIN)	6.03
hand shower mixer water 0.3Mpa(L/MIN)	10.95
hand shower mixer water 0.5Mpa(L/MIN)	14.84
hand shower singer cold water 0.1Mpa(L/MIN)	5.98
hand shower singer cold water 0.3Mpa(L/MIN)	10.86
hand shower singer cold water 0.5Mpa(L/MIN)	14.61
shower head mixer water 0.1Mpa(L/MIN)	8.92
shower head mixer water 0.3Mpa(L/MIN)	15.58
shower head mixer water 0.5Mpa(L/MIN)	20.27
shower head singer cold water 0.1Mpa(L/MIN)	8.76
shower head singer cold water 0.3Mpa(L/MIN)	15.24
shower head singer cold water 0.5Mpa(L/MIN)	19.75

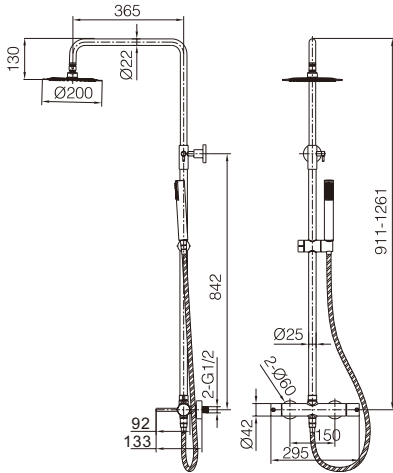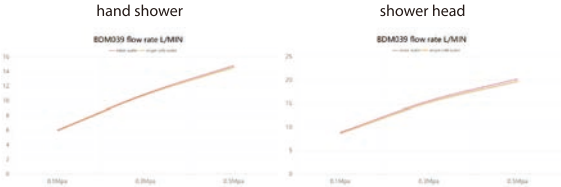

Product sizes (cm)	42.5*13.3*90
Weight (kg)	5.6
Guarantee	5 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

